



# QUICK REFERENCE GUIDE

Product Overview

## COLORING PRODUCTS

**Color Hardener™** concrete topping and hardener forms a colored concrete surface that is resistant to weathering, wear and normal abrasion.

Available in 42 standard colors, custom color matching available. **Color Hardener HD™** (Heavy Duty) also available.

Packaging - 5 gallon bucket Coverage - 80 to 100 ft<sup>2</sup> per bucket

CH-(color)  
CH-(color)HD



**Antique Release™** imparts a second color while serving as a bond breaker for stamping.

Available in 42 standard colors, custom color matching available.

Packaging - 5 gallon bucket

Coverage - 800 to 1000 ft<sup>2</sup> per bucket

RA-




**Antique-It™** is a water soluble antiquing agent designed to impart a secondary color or highlight resembling the look of release powder.

Available in 42 standard colors, custom color matching available.

Packaging - 3 lb container

Coverage - 2000 to 3000 ft<sup>2</sup> per 3 lb container

AN-



**FreestylePRO Solid Color Stain™** is a polymer-modified, water-based, high-quality stain, made especially for use over existing, unsealed, interior or exterior, concrete surfaces.

Available in 40 standard colors, custom color matching available.

Packaging - 4 part kit

Coverage - 200 to 400 ft<sup>2</sup> per FF kit.

FF-  
FS-



**FreestylePRO Highlighter™** stains are translucent and used to enhance FreestylePRO Solid Color Stain areas of relief on textured, cured concrete surfaces or for a variegated or unique look.

Available in 40 standard colors, custom color matching available.

Packaging - 3 part kit

Coverage - 200 to 400 ft<sup>2</sup> per kit. FE-



**Cem-Coat™** is a high-quality, self-priming, cementitious coating, made especially for use over existing, unsealed, interior or exterior, concrete surfaces.

Available in 42 standard colors, custom color matching available.

Packaging - 2-part kit

Coverage - 70 to 125 ft<sup>2</sup> small kit, 350 to 450 ft<sup>2</sup> large kit.

CC-(small)  
CC4-(large)



**Liquid Integral Color** is an iron oxide, water-based mixture that can be added to concrete at the batch plant or at the job site. BRICKFORM Liquid Color disperses evenly throughout the concrete mix, is dust free, and is prepackaged to integrally color concrete by the cubic yard.

Available in 24 standard colors, custom color matching available.

Coverage - packaged in one cubic-yard increments for a six-sack mix

LC-



**Powdered Integral Color** is an iron oxide pigment, pre-packaged in repulable bags that are added at the concrete batch plant. BRICKFORM Powdered Color disperses evenly throughout the concrete mix and complies with ASTM C979, Pigments for Integrally Colored Concrete.

Available in 25 standard colors, custom color matching available.

Coverage - .5 to 3 yards<sup>3</sup> per 10lb bag

PC-



**Color Wax** is a water-based, wax-modified colored concrete coating, formulated for exterior or interior concrete surfaces.

Available in all standard SOLOMON and BRICKFORM integral colors. (Color Wax is made to order, custom colors available.)

Coverage - 350 to 400 ft<sup>2</sup> per gallon

CW1B- (1 gallon)  
CW5B- (5 gallon)



**Blush-Tone Acid Stain™**, a chemical stain for concrete, reacts with newly cured or existing concrete, penetrating the very top layer of the concrete surface with color that will not chip, crack, or peel.

Available in 10 standard colors.

Packaging - 1 gallon bottle

Coverage - 200 to 300 ft<sup>2</sup> per gallon.

CS-



**ARtesian Stain™** is a water based stain designed to produce the aged appearance of stone or masonry and has no volatile organic compounds. It is ready-to-use, requiring no mixing or thinning.

Available in 18 standard colors.

Packaging - 1 gallon bottle

Coverage - approximately 200 ft<sup>2</sup>, per gallon, per coat.

AS-



**E-Stain™**, a non-hazardous reactive stain for concrete, produces unique color effects in finished cementitious surfaces that simulate the natural shadings and aged appearance of stone or masonry.

Available in 8 standard colors.

Packaging - 1 gallon bottle

Coverage - approximately 200 ft<sup>2</sup> per gallon.

ES-




## MAINTENANCE PRODUCTS

**E-Etch™** is an environmentally friendly industrial strength floor cleaner, degreaser and light etching product.

Packaging - 1 gallon bottle

Coverage - Approximately 250 ft<sup>2</sup> per gallon

ES-1200




**Premium Acrylic Floor Finish™** is an acrylic finish that forms a long lasting protective coating over a BRICKFORM sealer.


Packaging - 1 gallon bottle / 5 gallon pail

Coverage - approximately 500 to 1000 ft<sup>2</sup> per gallon depending upon porosity of the surface.

DW-1000 (1 gallon)  
DW-5000 (5 gallon)




# TEXTURING PRODUCTS

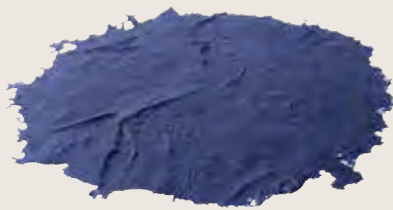

**Seamless Skins™** are feathered-edged skins that produce continuous texture with no grout or joint lines.

## Paladiano Texture Mats by Bob Harris


These speciality tools are cast from natural stones in historical regions with authentic textures and shapes that are pleasing to the eye from all angles.

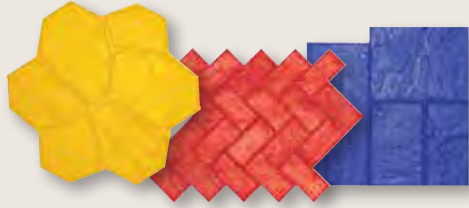

**Step-Liners** are designed to produce texture on the edges of concrete steps, risers, terracing and even concrete countertops. Also available in dimensional lumber sizes.



An array of **BRICKFORM Texture Mats** simulate a broad range of natural materials.



## Texturing Accessories

Available for your finishing needs, texturing accessories complement the full-line of texture mats.



Chisels



Touch-Up Wheels











Pounders



Grouting Tools

# PAPER STENCILS

Brickform Paper Stencils are made of thick, tear-resistant paper and come in a wide variety of popular patterns including stone, pavers, tile, cobblestone, and brick. (Sample offering shown.)



# POLISHING PRODUCTS

**Pro-Dye™ Plus** is a translucent dye, designed to penetrate and color any interior cementitious surface. Pro-Dye Plus is packaged in liquid form to be mixed in proportion with acetone or water. Pro-Dye Plus dries quickly, and can be easily sprayed on floors and vertical surfaces. Add **Mottling and Penetrating Agent** for variegated color (for use with acetone only, DS-8000). Available in 26 standard colors.

Packaging - 8-ounce bottle  
Coverage - 200 to 600 ft<sup>2</sup> per gallon, per coat.  
DSL-



**Lythic™ Densifier** with reactive colloidal silica is 99.5% pure silica, suspended through a proprietary "green" manufacturing process in an ultra-low surface tension liquid, allowing for greater penetration. It reacts with concrete to increase surface density, making it less permeable to liquids and improving impact and abrasion resistance. Lythic's nano-sized silica particles react with lime and bond directly to silica already in the concrete. Silica bonding results in greater hardening than standard densification. Reactive colloidal silica bonds and hardens decorative cementitious overlays that are low-lime and do not react well with sodium, lithium or potassium silicates.

Packaging - 1, 5, 55, 270 gallon concentrate or ready-to-use  
Coverage rate will depend on porosity of surface.

**Lythic™ XL Densifier** is a larger particle-size version of Lythic Densifier, designed for fast build-up for burnishing, and to repair soft slab surfaces.

Packaging - 1, 5, 55, 270 gallon concentrate or ready-to-use

Coverage will depend porosity of surface.



**Lythic™ Protector** improves on the effectiveness of traditional stain protectors by bonding additional silica to the concrete, further toughening it. Lythic Protector enhances color and creates depth of shine. It cures for foot traffic within 24 hours and improves traction of polished surfaces.

Packaging - 1, 5, 55 or 270 gallon concentrate

Coverage - 1200 to 1800 ft<sup>2</sup> per gallon mixed 1:1, or 600-900 ft<sup>2</sup>, depending on porosity of the surface.



**Lythic™ SPD Protector** utilizes new protection technology that achieves resistance equal to epoxy coatings against stains, acid etching, and liquid penetration, while remaining breathable. SPD (Silica-Polymer-Dispersion) is a two-part polymer combined with nano-sized colloidal silica. SPD bonds directly to the concrete, enhancing color, and providing significantly greater protection and longer service life than conventional stain protectors.

Packaging - 2 or 4 gallon, 2-part kit

Coverage - Parts A & B mixed  
- 1000 to 1500 ft<sup>2</sup> per gallon, depending on porosity of the surface.



**Lythic™ Cleaner** goes beyond cleansing by adding silica to the surface as it cleans. Reactive colloidal silica bonds to concrete, so every cleaning improves resistance to abrasion and liquid penetration. It is chemically matched to Lythic's stain protection products for complete compatibility.

Packaging - 1, 5, 55 or 270 gallon concentrate

Coverage rate will depend on application method. Hand mopping: 1 RTU gal = 250-450 ft<sup>2</sup>



# RESURFACING PRODUCTS

**SM Professional Grade™** (white) is a rough grade micro-topping, and can also be used as a sprayable cementitious overlay applied with a hopper gun. SM Professional Grade can be used to create the look of brick, stone, tile or other unique specialty finishes.

Packaging - 60 lb bag

Coverage - Base coat – 150 to 300 ft<sup>2</sup> per bag depending on texture and porosity of the concrete. Texture coats can be troweled or sprayed on at a rate of 150-200 ft<sup>2</sup> per 60lb bag.

MT-4000



**Micro-Topping™** (white) is used on interior or exterior cured concrete to create a smooth durable surface that can be colored or stained. The mixed materials form a thin concrete coating that can be used to restore or repair any concrete surface.

Packaging - 40 lb bag, Coverage - Brickform Micro-Topping will cover between 150 to 350 ft<sup>2</sup> per bag depending on the depth at which it is applied and the texture and porosity of the surface to which it is applied. Applications over the Brickform SM Professional Grade base coat can yield greater coverage rates. (No more than three 1/16" layers [3/16" total]) MT-2500 (white), MT-1500 (gray)



**Vertical Mix** is a lightweight vertical overlay mix designed for texturing vertical surfaces up to 2" and creating simulated stone, rock, tile, slate and other natural surfaces. It is composed of cement, polymers, lightweight aggregates and admixtures. It may be applied to vertical surfaces such as wood, drywall, concrete, blocks etc.

Packaging - 45 lb bag

Coverage - Square footage will depend on thickness of application. At 1/2" thickness one bag covers about 10 square feet.

VM-1000



**Stampable Overlay™** (white) is easy to install and forms a tough, durable topping that will withstand years of wear.

Packaging - 60 lb bag

Coverage - 25 ft<sup>2</sup> per 60lb bag at 1/4" thickness.

\*For use with Overlay Liquid Colorant

SC-60



**Stampable Overlay™** (gray)

Packaging - 60 lb bucket

Coverage - 27 ft<sup>2</sup> per 60-pound bucket at 1/4" inch thickness for trowel applications. Broom applications will vary with thickness and texture. Product CANNOT be applied thinner than 1/4". It will hydrate too quickly and shrinkage will occur.

\*For use with Brickform Color Hardener and Antique Release or stains. OL-60



**Liquid Polymer™** is a catalyst for Brickform Micro-Topping and SM Professional Grade resurfacing products.

Packaging - 5 gallon bucket

Coverage - see appropriate overlay product TIS.

MT-3000



**Overlay Liquid Colorant** is specifically designed for Brickform resurfacing products.

Available in 39 standard colors (Not available in Smokey Blue or White).

Packaged in six 10 oz. bottles

One 10 oz. bottle per bag of Micro-Topping/SC-60 Overlay.

MTC-



**Turtle Set™** is a retardant designed for use with Brickform SM Professional Grade, Micro-Topping, OL-60 and SC-60 Stampable overlay products. Easily measured liquid form increases pot life and set times for greater control with resurfacing products in warm weather.

Packaging - 1 gallon bottle

Coverage - add 4 to 8 oz to each bag overlay material (no more than 16 oz)

TS-1



**Triple Seven Bond Coat™** is a reactive primer, remaining active for at least two hours after it is applied. It reacts and forms a chemical link between the overlay and the substrate. Triple Seven Bond Coat increases the bond strength by creating a more efficient chemical link between the concrete and the overlay.

Packaging - 5 gallon bucket

Coverage - 800 to 1000 ft<sup>2</sup> per 5 gallon bucket. Coverage will vary according to the porosity and composition of the floor material.

BC-0071 (1 gallon)

BC-007 (5 gallon)



# FINISHING AIDS

**Liquid Release** is a colorless bond- breaker, formulated and recommended for use with all BRICKFORM Texture Mats and with many other architectural concrete texturing systems. BRICKFORM Liquid Release forms a lubricating barrier that prolongs the life of the imprinting tools by decreasing the friction between the mats and the concrete.

Packaging - 1 or 5 gallon

Coverage - 150 to 250 ft<sup>2</sup> per gallon

LR-1 (1 gallon)

LR-5 (5 gallon)



**Neutra Clean** is a cleaning and neutralizing agent engineered for use on acid and reactive stained floors prior to sealing and to remove light oil, grease or other types of soils from colored, imprinted and natural concrete surfaces.

Packaging - 1 gallon bottle

Coverage rates are determined by dilution ratios and will vary depending on the strength needed for a particular project. Recommended dilution rate is 4 oz. of Brickform Neutra Clean to one gallon of water. Stronger solutions may be necessary on heavily soiled floors.

NC-1 (1 gallon)



**DAY1** will extend workable time under adverse conditions such as high wind, heat, or low humidity. Highly effective when used to help finish shake-on hardeners in low bleedwater environments and when finishing high performance concrete, DAY1 will reduce the potential for checking, crazing, scaling and dusting. This technology decreases the Moisture Vapor Emissions Rate which in turn decreases Alkali Silica Reaction. This also reduces efflorescence in colored and uncolored concrete, revealing more of a true finished color.

Packaging - 1, 5, 55, 270 gallon concentrate or ready-to-use

Coverage - DAY1 will yield different results based on the jobsite conditions and usage demands. Approx 250-1000 ft<sup>2</sup>.



**Surface Deactivator** by Solomon Colors makes exposed aggregate finishes easier and more consistent. It is typically applied to freshly-placed concrete to prevent cement paste hardening and achieve more controlled exposed aggregate finishes. Unlike sugar-based retarders with uncertain levels of retardation, Surface Deactivator selectively halts the hydration process down to a controlled depth. Ten predetermined depths of exposure are available, color-coded for identification, to provide consistent, repeatable cement paste removal and aggregate reveal.

Packaging - 1 or 5 gallon

Coverage rates vary depending on type of spray and finish of concrete

SSD - See [www.brickform.com](http://www.brickform.com) for a complete product list





# SEALERS

**UreMax WB™** is a two-part, matte-finish, water-based polyurethane that forms a high-solids coating. UreMax WB preserves and protects any above-grade concrete, masonry or stone. It is the most durable, chemical-resistant barrier coating of the BRICKFORM sealers.

Packaging - 2 part kit

Coverage - 350 to 600 ft<sup>2</sup> per gallon, depending on porosity of the surface and method of application

UMS-1 (1 gallon kit), UMS-4 (4 gal. kit)



**Poly-Astic™** is a two-part high-solids, high-build sealer designed for use on concrete or masonry surfaces. Poly-Astic allows for single-coat high-film thickness in a water-clear finish. Poly-Astic provides a very smooth, mirror-like finish not attainable with any other product.

Packaging - 2 part kit

Coverage - 200 to 400 ft<sup>2</sup> per gallon

PA-1 (2 gallon kit)

PA-25 (2 quart kit)



**DecoPoxy™** is a water-based, low-VOC, penetrating epoxy coating that has been specifically formulated to protect interior commercial or residential cementitious floors. It provides a high gloss, wear and chemical resistance, and an easy-to-maintain finish, while bringing up the full depth of color on acid stained or decorative floors.

Packaging - 2 part kit

Coverage - 400 ft<sup>2</sup> per kit

DECOPOXY (1.5 gallon kit)



**Stealth-Seal™** is non-film forming water and oil repellent sealer that effectively protects and preserves the natural appearance of any surface. It works by creating an invisible barrier at the surface level through a chemical reaction between the sealer and the cement paste, allowing vapor transmission while strongly repelling water and oil.

Packaging - 1 gallon bottle, 5 gallon bucket

Coverage - 150 to 800 sq ft per gallon, depending on porosity of the surface and method of application.

ST-1 (1 gallon), ST-5 (5 gallon)



**Stealth-Seal Premium™** will repel water and oil more effectively, has greater stain resistance and has 50% longer service life than regular Stealth-Seal.

Packaging - 1 gallon bottle, 5 gallon bucket

Coverage - 150 to 800 sq ft per gallon, depending on porosity of the surface and method of application.

STP-1 (1 gallon), STP-5 (5 gallon)



**Gem Cure & Seal™** is a solvent based, clear acrylate co-polymer curing compound, dust proofer and sealer all in one.

Packaging - 1 gallon can, 5 gallon pail

Coverage - approximately 250 to 300 ft<sup>2</sup> per gallon, depending upon porosity of the surface.

GCS1-65025 (1 gallon), GCS-65025 (5 gallon) 650 VOC

GCS1-35025 (1 gallon), GCS-35025 (5 gallon) 350 VOC

GCS1-35018 (1 gallon), GCS-35018 (5 gallon) 350 VOC for CA

GCS1-10018 (1 gallon), GCS-10018 (5 gallon) 100 VOC for CA



**Satin Cure & Seal™** is a water-based, zero VOC, clear acrylic co-polymer curing compound, dust proofer and sealer all in one.

Packaging - 1 gallon bottle, 5 gallon bucket

Coverage - approximately 250 to 300 ft<sup>2</sup> per gallon, depending upon porosity of the surface.

SCS1-10025 (1 gallon), SCS-10025 (5 gallon)

SCS1-10018 (1 gallon), SCS-10018 (5 gallon) for CA



**Gem-Seal™** is a high-gloss, solvent-based, non-yellowing sealer. A light coating of this UV-resistant sealer will protect and enhance colored and textured concrete, and shield against stains and mildew.

Packaging - 1 gallon can, 5 gallon pail

Coverage - approximately 250 to 350 ft<sup>2</sup> per gallon, depending upon porosity of the surface.

GS-1 (1 gallon), GS-5 (5 gallon)

GS1-100 (1 gallon), GS5-100 (5 gallon)

GS1-700 (1 gallon), GS5-700 (5 gallon)



**Poly-Seal™** is a solvent-based, high-gloss, super-tough acrylic sealer that is easy to clean and maintain. Poly-Seal protects with a UV-resistant coating that penetrates the surface to retard efflorescence and resist oil, grease and food stains.

Packaging - 1 gallon can, 5 gallon pail

Coverage - approximately 250 to 300 ft<sup>2</sup> per gallon, depending upon porosity of the surface.

PS-1 (1 gal), PS-5 (5 gal) 650 VOC

PS1-100 (1 gal), PS5-100 (5 gal) 100 VOC

PS1-400 (1 gal), PS5-400 (5 gal) 400 VOC



**Safety-Seal™** is a UV-resistant, matte-finish sealer designed to be slip-resistant and is ideal around pool decks and areas where water or moisture can accumulate. Safety-Seal is a solvent-based sealer that protects concrete surfaces from stains and mildew.

Packaging - 5 gallon pail

Coverage - approximately 200 to 300 ft<sup>2</sup> per gallon, depending upon porosity of the surface.

MS-5 (5 gallon) 400 VOC

MS5-100 (5 gallon) 100 VOC



**Satin-Seal™** is a non-flammable product, designed to protect concrete with a satin finish. This waterbased acrylic VOC-compliant sealer reduces the effect of efflorescence on porous surfaces, while forming a non-yellowing, scuff-resistant finish that resists moisture penetration.

Packaging - 5 gallon bucket

Coverage - approximately 250 to 300 ft<sup>2</sup> per gallon, depending on porosity of surface. Spray application recommended.

SS-5



**Strip-It™** is an environmentally sound and user-safe stripper for solvent-based sealers and paints. Strip-It may be used on all masonry surfaces including concrete, quarry tile, ceramic tile, terrazzo, cementitious overlays and other surfaces. Strip-It meets 2005 California Air Resources Board VOC standards (less than 50% V.O.C. by weight).

Packaging - 1 gallon bottle, 5 gallon bucket

Coverage - 60 to 100 ft<sup>2</sup> per gallon, depending on amount and type of coating

SR-1 (1 gallon), SR-5 (5 gallon)



**Tinta' Seal™** is a color tint pack additive for solvent-based sealers. It can enhance and correct the color of existing cementitious surfaces such as integral color concrete, stamped concrete, overlays or plain concrete. The BRICKFORM Tinta' Seal tint packs are designed to be used with any of our solvent-based sealers. It is packaged in a 16 oz can that is mixed onsite with a 5-gallon pail of either Gem-Seal, Poly-Seal or Gem Cure & Seal.

Packaging - 16 ounce can

Coverage - 1 can per 5 gallon sealer

TASB-(color)



**Traction Grip™** is an anti-slip micronized powder that adds texture to decorative sealers (BRICKFORM Gem-Seal, Poly-Seal, and Satin Seal). The lightweight spherical shape and clarity gives Traction Grip its specific properties. Applications include inclined driveways, garages, steps, patios and pool decks.

Packaging - 1 lb jar

Coverage - 1 jar per 5 gallon sealer

TG



**Matte-Magic™** is a liquid, field-added, flattening agent additive for Brickform solvent based sealers. The original topcoat gloss is reduced based on the amount of additive used. The finished gloss reflectance can be varied from semi-gloss to satin.

Packaging - 16 ounce jar

Coverage - 1 to 2 cans per 5 gallon sealer

MM-100

